

DUMPING SPIRAL MIXER ON TWO SIDES



PROFESSIONAL



CAPACITY (kg)

•200 **•**300

■250












SPIRAL MIXER WITH DUMPING ON TWO SIDES

TECHNICAL FEATURES

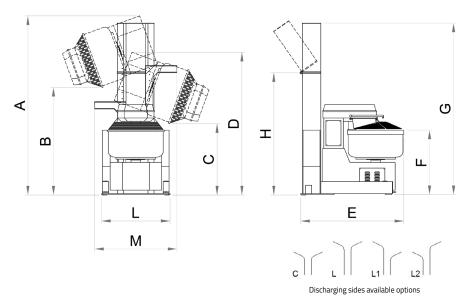

TECHNICAL DATA

TECHNICAL DATA					
MODEL			ASR 200	ASR 250	ASR 300
Dough capacity (min./max) *		kg	10/200	15/250	20/300
Flour capacity (min./max) *		kg	6/125	9/150	12/185
Water capacity (min./max) *		lt	4/75	6/100	8/115
Bowl volume		lt	285	380	470
% water/flour minimum		%	50	50	50
Spiral turns 1st / 2nd speed (50/60Hz)		rpm	86/170	86/170	86/170
Bowl turns 1st / 2nd speed (50/60Hz)		rpm	9/18	9/18	9/18
Motors power 1st/2nd speed		kw	4.6/7.4	7.1/12.1	7.1/12.1
Current drawn V 230/400		А	27.5/16	44/26	44/26
Spiral bar diameter		mm	48	60	60
Total height (machine during discharging phase "L")	А	mm	3000	3000	3000
Maximum discharging height	В	mm	1780	1780	1730
Minimum discharging height	С	mm	1180	1130	1080
Total height (Machine in discharge with lifters in C model)	D	mm	2400	2400	2400
Total depth	Е	mm	1710	1820	1920
Height from bowl edge (machine to the ground)	F	mm	1010	1040	1060
Total height (machine to the ground)	G	mm	2840	2840	2840
Column height when packed	Н	mm	2025	2025	2025
Total width	М	mm	1350	1350	1350
Mixer width	L	mm	1150	1150	1150
Net weight		Kg	1580	1670	1720

^{*:} capacity determined in view of % liquid/flour equal to 60.

All data are to be considered as nominal, MIXER srl reserves the right to make any changes to the product and/or technical specifications without notice.

STANDARD FEATURES

- Painted steel structure.
- Possibility to dump the bowl on table (1,2 m approx.) or on divider (1.7 m approx.) on right and left (to specify together with premises height).
- Hydraulic lifting system.
- Stainless steel bowl, spiral tool, contrast column and security guard.
- ${\color{blue}\bullet}$ Two independent motors with two-speed for spiral and bowl.
- Bowl's motion given by pulleys and V-belts.
- Bowl thrust rollers.

- Commands on mobile panels with two timers, setting of work time with automatic shift from 1st to 2nd speed.
- Selector to reverse bowl movement.
- Impulse buttons to rotate the bowl and remove product.
- Selector to activate second bowl speed.
- Right/Left dumping selector.
- Dumping control with hold-to-run buttons.

ON REQUEST

• Computer with 7" touch-screen able to program 100 recipes and work in manual or automatic mode.

