

ASR

DUMPING SPIRAL MIXER ON TWO SIDES

MIXER
ART OF MIXING


PROFESSIONAL

CAPACITY (kg)

- 200
- 300
- 250



TECHNICAL FEATURES

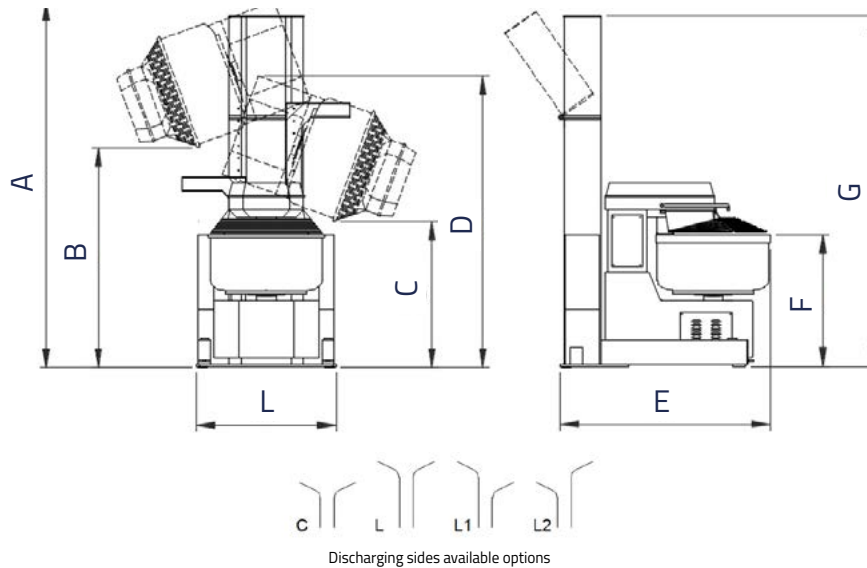

TECHNICAL DATA

| MODEL | | ASR 200 | ASR 250 | ASR 300 |
|---|------|---------|----------|----------|
| Dough capacity (min./max) * | kg | 10/200 | 15/250 | 20/300 |
| Flour capacity (min./max) * | kg | 6/125 | 9/150 | 12/185 |
| Water capacity (min./max) * | lt | 4/75 | 6/100 | 8/115 |
| Bowl volume | lt | 285 | 380 | 470 |
| % water/flour minimum | % | 50 | 50 | 50 |
| Spiral turns 1st / 2nd speed (50/60Hz) | rpm | 86/170 | 86/170 | 86/170 |
| Bowl turns 1st / 2nd speed (50/60Hz) | rpm | 9/18 | 9/18 | 9/18 |
| Motors power 1st/2nd speed | kw | 4.6/7.4 | 7.1/12.1 | 7.1/12.1 |
| Current drawn V 230/400 | A | 27.5/16 | 44/26 | 44/26 |
| Spiral bar diameter | mm | 48 | 60 | 60 |
| Total height (machine during discharging phase "L") | A mm | 3000 | 3000 | 3000 |
| Maximum discharging height | B mm | 1780 | 1780 | 1730 |
| Minimum discharging height | C mm | 1180 | 1130 | 1080 |
| Total height (Machine in discharge with lifters in C model) | D mm | 2400 | 2400 | 2400 |
| Total depth | E mm | 1710 | 1820 | 1920 |
| Height from bowl edge (machine to the ground) | F mm | 1010 | 1040 | 1060 |
| Total height (machine to the ground) | G mm | 2840 | 2840 | 2840 |
| Total width | L mm | 1150 | 1150 | 1150 |
| Net weight | Kg | 1580 | 1670 | 1720 |

*: capacity determined in view of % liquid/flour equal to 60.

All data are to be considered as nominal, MIXER srl reserves the right to make any changes to the product and/or technical specifications without notice.

STANDARD FEATURES

- Painted steel structure.
- Possibility to dump the bowl on table (1,2 m approx.) or on divider (1.7 m approx.) on right and left (to specify together with premises height).
- Hydraulic lifting system.
- Stainless steel bowl, spiral tool, contrast column and security guard.
- Two independent motors with two-speed for spiral and bowl.
- Bowl's motion given by pulleys and V-belts.
- Bowl thrust rollers.
- Commands on mobile panels with two timers, setting of work time with automatic shift from 1st to 2nd speed.
- Selector to reverse bowl movement.
- Impulse buttons to rotate the bowl and remove product.
- Selector to activate second bowl speed.
- Right/Left dumping selector.
- Dumping control with hold-to-run buttons.

ON REQUEST

- Computer with 7" touch-screen able to program 100 recipes and work in manual or automatic mode.